

Vinyl Wallcovering

1.Fabric Back Vinyl Wallcovering

Catalogue: Element 2









Specification

Material:	Osnaburg Fabric back,100% vinyl coating.
Size:	Width:1.37m/54" Length:50m
Weight:	15oz/ly,340gr/sqm
Packing:	1 Roll/CTN
Carton Size:	140 cm*20 cm*20 cm
Funtion:	Fireproof,waterproof,scartch-resistant & Moisture-Proof
Usage:	Commercial wall decoration like hotel,office and traffic area.







ET-2011	ET-2012	ET-2013	ET-2014	ET-2015	ET-2016
ET-2017	ET-2018				








					
ET-2021	ET-2022	ET-2023	ET-2024	ET-2025	ET-2026
					
ET-2027	ET-2028				



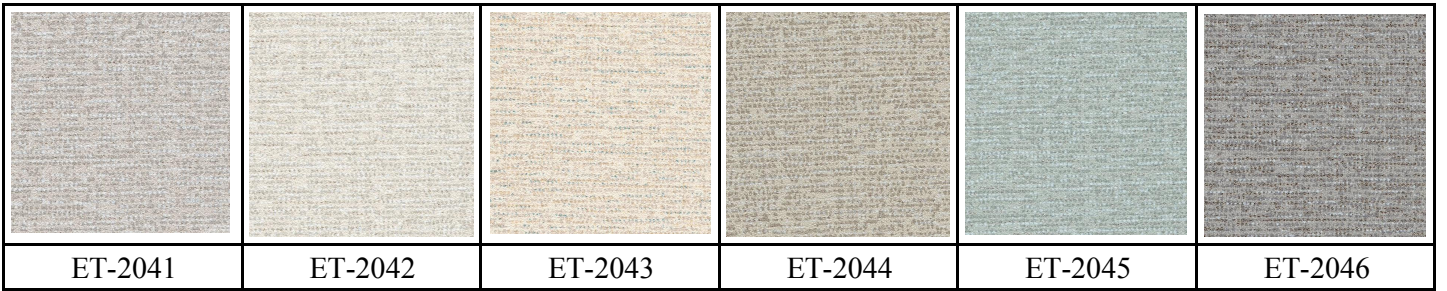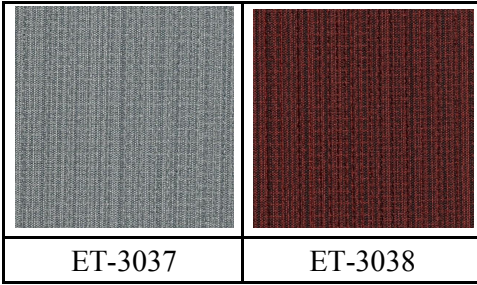





					
ET-3031	ET-3032	ET-3033	ET-3034	ET-3035	ET-3036






					
ET-2051	ET-2052	ET-2053	ET-2054	ET-2055	ET-2056

	
ET-2057	ET-2058



					
ET-2061	ET-2062	ET-2063	ET-2064	ET-2065	ET-2066

		
ET-2067	ET-2068	ET-2069



					
ET-2071	ET-2072	ET-2073	ET-2074	ET-2075	ET-2076
					
ET-2077	ET-2078				

Physical Propertion:

Property		Standard	Reasult	Method
Heavy Metal Elements(mg/kg)	Pb	5	ND	BS EN 12149-1998
	Sb	5	ND	
	As	5	ND	
	Ba	10	ND	
	Cd	5	ND	
	Cr	5	ND	
	Hg	5	ND	
	Se	10	ND	
Vinyl Chloride Monomer/VCM(mg/kg)		0.1	ND	BS EN 12149-1998
Formaldehyde(mg/kg)		20	ND	BS EN 12149-1998
Longitudinal Dry Friction		≧4	4~5	QB/T 4034-2010
Lateral Dry friction		≧4	4~5	
Longitudinal Wet Friction		3~4	4~5	
Lateral Wet friction		3~4	4~5	
Longitudinal Wet Tensile Load(kN/m)		≧0.53	7.94	
Lateral Wet Tensile Load(kN/m)		≧0.53	4.72	
Flame Retardancy			Class A	ASTM E 84(BLDG)

Features and Benefits:

Nice for any commercial facility--office building,hotels,schools,goverment duilding ect.

Strong and durable,can last for more than 7 years.

washability/scrubbing,stain resistant,easy clean.

Tear strength and abrasion resistance