

FOSHAN YUANSU NEW MATERIAL CO.,LTD

Address: No.363 Pingkang Road, Xuzhen, Hecheng Street (Xi'an), Gaoming District, Foshan, Guangdong, China

Vinyl Wallcovering





1. Fabric Back Vinyl Wallcovering









Catalogue: MASTE MD





Specification





Material:

Size:	Osnaburg Fabric back, 100% vinyl coating.
	Width: 1.37m/54" Length: 50m
Weight:	15oz/ly, 340gr/sqm
Packing:	1 Roll/CTN
Carton Size:	140 cm*20 cm*20 cm
Function:	Fireproof, waterproof, scartch-resistant & Moisture-Proof
Usage:	Commercial wall decoration like hotel, office and traffic area.

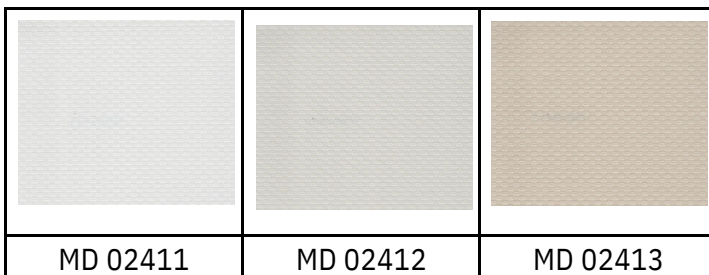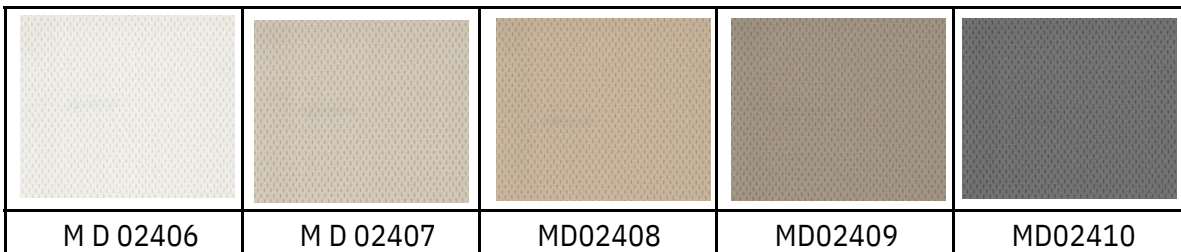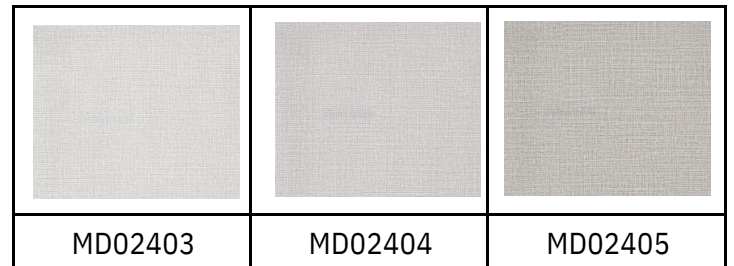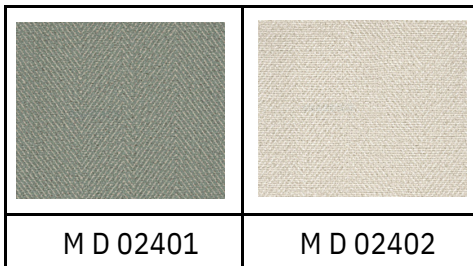

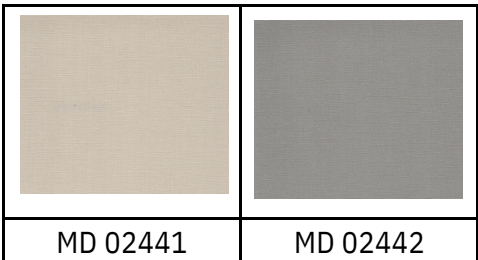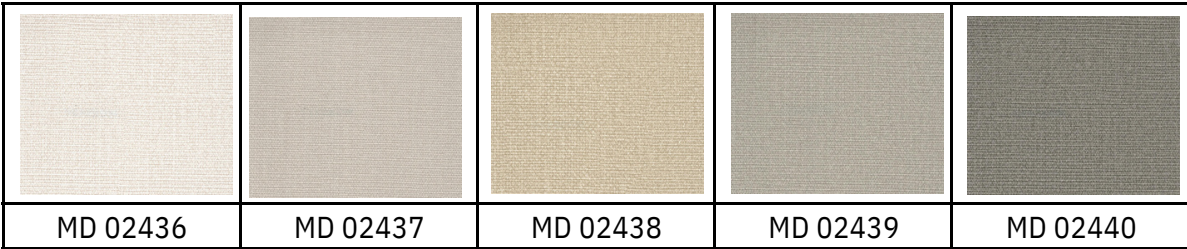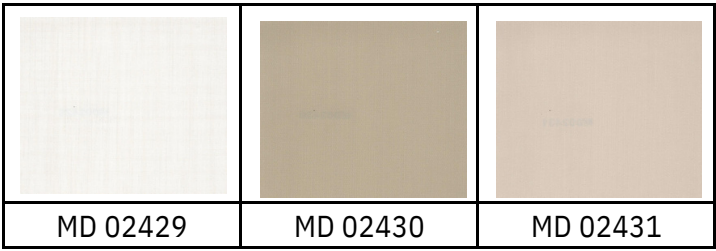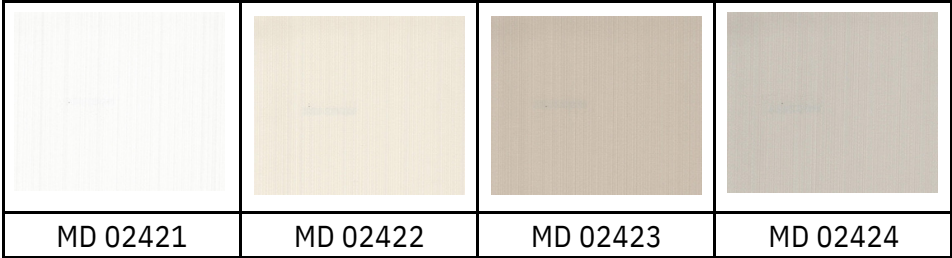

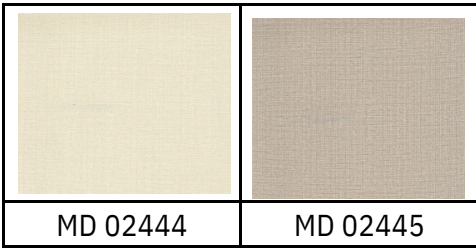

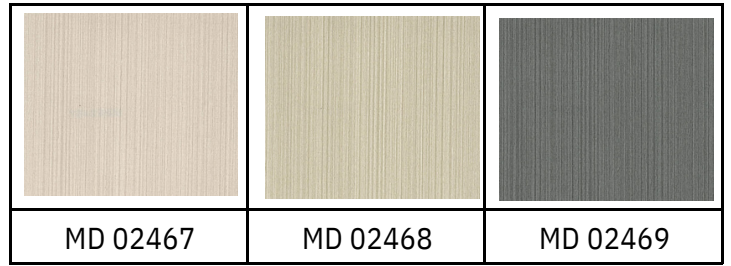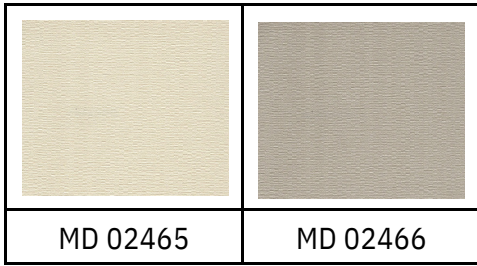

Physical Propertion:

Property	Standard	Result	Method
Heavy Metal Elements(mg/kg)	Pb	5	ND
	Sb	5	ND
	As	5	ND
	Ba	10	ND
	Cd	5	ND
	Cr	5	ND
	Hg	5	ND
	Se	10	ND
Vinyl Chloride Monomer/VCM(mg/kg)	0.1	ND	BS EN 12149-1998
Formaldehyde(mg/kg)	20	ND	BS EN 12149-1998
Longitudinal Dry Friction	≥4	4~5	BS EN 12149-1998
Lateral Dry friction	≥4	4~5	QB/T 4034-2010
Longitudinal Wet Friction	3~4	4~5	
Lateral Wet friction	3~4	4~5	
Longitudinal Wet Tensile Load(kN/m)	≥0.53	7.94	
Lateral Wet Tensile Load(kN/m)	≥0.53	4.72	
Flame Retardancy		Class A	

Features and Benefits:

Nice for any commercial facility--office building,hotels,schools,government building ect.

Strong and durable,can last for more than 7 years.

washability/scrubbing,stain resistant,easy clean.

Tear strength and abrasion resistance



ANB DECOR



www.anbdecor.com